

## PTFE SEALING TAPE

*FITTINGS FOR COMPRESSED AIR › COMPONENTS FOR INDUSTRIAL COMPRESSED AIR PLANTS › VARIOUS ACCESSORIES FOR COMPRESSED AIR SYSTEMS*

Non-sintered tape in virgin PTFE resin resistant to all chemical compounds and solvents, except gaseous fluorine or chlorine trifluoride and alkaline compounds, molten or in solution.

Operating temperature range: - 200° + 260° C.

**Available belt widths (mm):** 12 □ 19 □ 25

on request Width 12mm UNI 751/3 FRP

on request Width 12mm UNI 751/3 GRP

**Roll lengths (m):** 12 □ 15 - 25 - 50 metres


### **Thicknesses:**

0.075 mm for hydraulics or standard uses

0.10 mm for Gas (pink version for steam)

0.20 mm for professional uses

Packed in cardboard boxes of 250 rolls

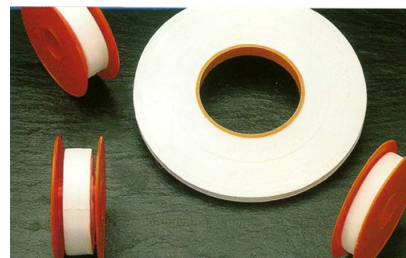

[Mastertubi.it/q?306](http://Mastertubi.it/q?306)