

## COPPER-PLATED POLYURETHANE HOSE (PUR) - 0.60

HOSES › Flexible polyurethane hoses for dust and shavings extraction

Ester-based polyurethane tube with built-in COPPERED harmonic steel spiral, very light and flexible.

High resistance to abrasion and cutting.

**Leaf thickness: 0.60 mm**


Color: transparent, BLUE on request

**Standard sizes 10 metres** , on request up to 20 metres, but only up to Ø 200.

Operating temperature -40° +90° C

Maximum peak temperature of 125° C

Axial compressibility: 3:1

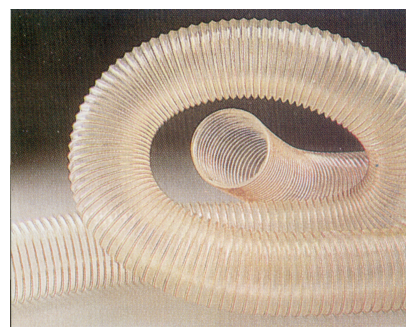

Mastertubi.it/q?411

### Use:

suction and delivery of dust, sawdust, shavings, textile fibres, paper.

### Available on request:

food version, also for the pharmaceutical industry, Ether base.

antistatic version Resistivity <math> < 10^8 \text{ O/m}</math>.

conductive version.

Code	Diameters interiors mm	Operating pressure bar	Depression bar	Radius of curvature mm	weight g/m
11PVPUR000040	40	0.70	0.35	25	270
11PVPUR000050	50	0.60	0.30	30	340
11PVPUR000060	60	0.50	0.25	40	420
11PVPUR000070	70	0.45	0.22	45	480
11PVPUR000080	80	0.40	0.15	50	550
11PVPUR000100	100	0.30	0.14	65	680

11PVPUR000120	120	0.25	0.12	75	770
11PVPUR000130	130	0.25	0.10	85	910
11PVPUR000150	150	0.15	0.08	100	1050
11PVPUR000160	160	0.15	0.08	105	1120
11PVPUR000180	180	0.12	0.06	120	1200
11PVPUR000200	200	0.10	0.06	130	1370
11PVPUR000250	250	0.06	0.04	165	1660
11PVPUR000300	300	0.04	0.03	200	2050
11PVPUR000350	350	0.03	0.02	235	2380
11PVPUR000400	400	0.02	0.02	270	2720
11PVPUR000450	450	0.01	0.01	300	3040
11PVPUR000500	500	0.01	0.01	350	3640