

FLEX HOSE HT 650

HOSES › Gas and hot fume suction pipes

Lightweight flexible hose made with a double layer of asbestos-free fabric, coated with POLYURETHANE reinforced by intertwined stainless steel wires and a spiral

galvanized exterior which gives considerable external protection against abrasion.

Flame resistant, non-toxic. Flexible and axially compressible.

Hardly flammable, resistant to tearing.

Gray colour. Excellent resistance to high temperatures: - 20° +650° C (+750° maximum peak).


Lengths on request starting from 2 meters up to a maximum of 15 meters with any

smooth sleeves at the ends.

Use:

gas suction from engine test benches for the automotive industry and industrial and special vehicles.

Suction and conveyance of high temperature air in industrial furnaces, steel industry, engine test rooms.

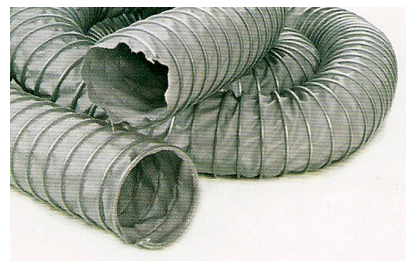

Mastertubi.it/q?368

Dimensions Ø mm	Depression bar	Curvature radius mm	Weight Kg/m
60	0.320	36	1.35
75	0.255	45	1.65
80	0.228	48	1.80
100	0.168	60	1.80
120	0.118	72	2.00
125	0.105	75	2.10
150	0.076	90	2.20
160	0.067	96	2.40
180	0.052	108	2.80
200	0.042	120	3.00
250	0.029	175	3.55
300	0.019	210	4.60
350	0.015	245	5.00
400	0.011	280	5.90
500	0.007	400	7.40