

HOT-AIR 120 RUBBER HOSE

HOSES › Gas and hot fume suction pipes

HOSE FOR HOT AIR PASSAGE FOR MOTORS OR DRYERS

Flexible rubber hose composed of a smooth black EPDM rubber underlayer resistant to high temperatures with incorporated steel spiral and reinforcing textile inserts.

Anti-static black EPDM rubber cover

Operating temperature: -40° $+120^{\circ}$


Operating pressure 1 bar, safety coefficient 3

Suction: from 500 to 100 mm Hg depending on the diameters

Minimum bend radius: 4 times the diameter of the internal hole of the pipe

On request, execution with smooth sleeves at the end on the size of use

Connection using clamps, collars, pressing.

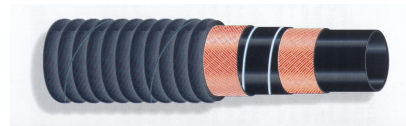

Mastertubi.it/q?390