


art.702 INTERMEDIATE AT

FITTINGS FOR THE CHEMICAL AND FOOD INDUSTRY › POM QUICK CONNECTORS - SERIES 700

| ØD1 | ØD2 | ØD3 | B1 | B2 | B3 | ØE | H | L | WEIGHT | CONF. |
|-----|-----|-----|------|------|------|------|------|------|--------|-------|
| 4 | 4 | 4 | 14.7 | 14.7 | 14.7 | 13.2 | 24.5 | 35.8 | 5.8 | 100 |
| 6 | 6 | 6 | 16.1 | 16.1 | 16.1 | 15.0 | 27.6 | 40.2 | 7.3 | 50 |
| 8 | 8 | 8 | 17.5 | 17.5 | 17.5 | 17.6 | 30.7 | 43.8 | 10.6 | 50 |
| 10 | 10 | 6 | 20.1 | 20.1 | 16.1 | 20.0 | 35.1 | 51.6 | 15.3 | 25 |
| 10 | 8 | 6 | 17.5 | 17.5 | 16.1 | 20.0 | 35.1 | 51.3 | 15.6 | 25 |
| 10 | 10 | 10 | 20.1 | 20.1 | 20.1 | 20.0 | 35.8 | 51.6 | 14.6 | 25 |
| 12 | 10 | 12 | 24.7 | 20.1 | 24.7 | 23.0 | 42.5 | 63.4 | 24.2 | 20 |
| 12 | 12 | 12 | 24.7 | 24.7 | 24.7 | 23.0 | 43.2 | 63.4 | 23.2 | 20 |
| 15 | 15 | 15 | 29.4 | 29.4 | 29.4 | 28.0 | 52.2 | 76.4 | 38.2 | 9 |
| 22 | 12 | 12 | 33.8 | 24.7 | 33.8 | 35.5 | 55.8 | 83.0 | 50.3 | 6 |
| 22 | 15 | 22 | 33.8 | 30.4 | 33.8 | 35.5 | 61.0 | 87.0 | 57.1 | 6 |
| 22 | 22 | 22 | 33.8 | 33.8 | 33.8 | 35.5 | 63.9 | 92.3 | 64.0 | 6 |

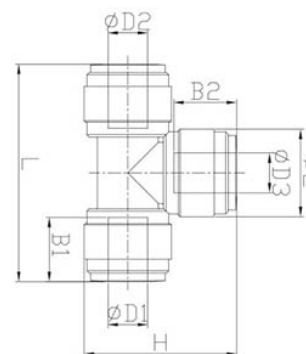

Mastertubi.it/q?931