

END LOCK SYSTEM

HOSES › Flexible rubber hoses for passage of industrial abrasives

BLOC-END® COUPLING

Hydraulic and pneumatic handling of abrasive materials


Standardized drilling: ID=150mm: WP 10bar - DI>150mm: WP 5bar

Pipes can be cut to size on site or in production to meet specific installation requirements.

Easy to cut: No special tools are required as the mating face acts as a cutting guide.

The flange can be easily adjusted for mounting and will not deform during service.

Quick and easy to replace. Fittings can be removed from a damaged hose and reused if replaced.

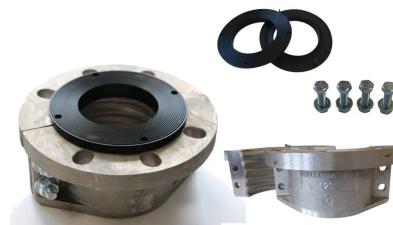

Mastertubi.it/q?1408

Pipe internal diameter (mm)	Item number	Item number	Item number	Number of bolts	Item/piece number
25	5103109	0195500	5103110	4	5103113
32	5103111	0195501	5103112	4	5103113
40	0117042	0116890	0116966	4	0111322
50	0117043	0116891	0116967	4	0111322
65	0117044	0116893	0116968	4	0111322
80	0117045	0116895	0116969	4	0111322
100	0117046	0116897	0116970	4	0111322
125	0117047	0116899	0116971	4	0111322
150	0117048	0116901	0116972	4	0111322
200	0117049	0116902	0116973	6	0111322
250	0118093	0118089	0118087	6	0111322
300	0118095	0118091	0118088	6	0111322
350	5101097*	5100847	5100848	6	5102957
400	5102956	5102955	5102953	6	5102957