

## COMPRESS HOSE 20 bar

FITTINGS FOR COMPRESSED AIR › COMPONENTS FOR INDUSTRIAL COMPRESSED AIR PLANTS › HOSES FOR COMPRESSED AIR SYSTEMS


SBR rubber hose with synthetic thread reinforcement.

Smooth black cover, underlayer resistant to traces of sprayed oil.

Operating pressure 20 bar, burst 60 bar.

Operating temperature: -30° C +70° C.

Use: compressed air/water/inert fluid delivery

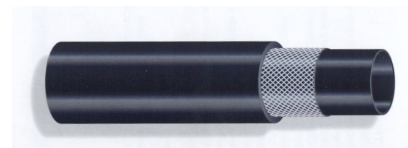

[Mastertubi.it/q?268](http://Mastertubi.it/q?268)

Code	ØixØe mm	Radius of curvature mm	Weight Kg/m	Rolls m
01G020006/014	6x14	18	0.20	100
01G020008/017	8x17	24	0.28	100
01G020010/019	10x19	30	0.32	100
01G020013/023	13x23	60	0.40	50
01G020016/026	16x26	70	0.48	50
01G020019/030	19x30	80	0.42	50
01G020025/37	25x37	100	0.90	50