

EXTENSIBLE CONNECTED SPIRAL POLYURETHANE SPIRAL

FITTINGS FOR COMPRESSED AIR › COMPONENTS FOR INDUSTRIAL COMPRESSED AIR PLANTS › HOSES FOR COMPRESSED AIR SYSTEMS

Etere-based extensible spiral polyurethane hose EXTRAFLEX S90 with a wide range of colors and single and multiple sizes. We recommend using it with fitting fittings.


Also available with pre-assembled brass fittings with reinforcement spring, gas swivel male thread.

Material hardness 45 shoreD

Operating temperature -40° +60°C

Ideal for compressed air, water and paint dust.

Color available: light blue

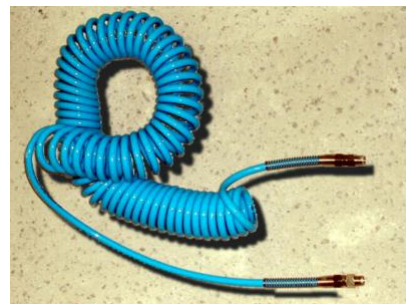

Mastertubi.it/q?274

Dimensions mm	Length nominal m	TO rest mm	Usage useful m	length tang mm	Spiral int-est mm
2.5x4	3.0	300	2	100-100	10/18
2.5x4	4.0	210	3	100-100	20/28
4x6	2.0	140	3	100-100	20/32
4x6	4.0	325	3	100-100	20/32
5.5x8	2.5	190	2	120-500	25/41
5.5x8	5.0	410	4	120-500	25/41
5.5x8	7.5	660	6	120-500	25/41
5.5x8	10.0	800	8	120-500	25/41
5.5x8	12.5	1030	10	120-500	25/41
6.5x10	2.5	140	2	120-500	40/60
6.5x10	5.0	330	4	120-500	40/60
6.5x10	7.5	500	6	120-500	40/60
6.5x10	10.0	680	8	120-500	40/60
6.5x10	12.5	800	10	120-500	40/60
8x12	2.5	115	2	120-500	50/74
8x12	5.0	305	3	120-500	50/74
8x12	7.5	430	6	120-500	50/74
8x12	10.0	600	8	120-500	50/74
8x12	12.5	800	10	120-500	50/74
8x12	15.0	930	13	120-120	50/74