


DOUBLE-LAYER FIREPROOF NON-SPARKING POLYURETHANE HOSE

HOSES › Hoses for Pneumatic Applications › POLYURETHANE - ELASTOLLAN - EXTRAFLEX HOSES

Flexible multilayer pipe made of double internal layer of plasticized Polyamide 12 PHL.

Stabilized to light and heat. Externally by a layer of polyurethane based SELF-EXTINGUISHING ETHER UL94V0 which ensures the pipe is protected from sparks and welding slag.

The external protective sheath has been designed to be easily removed with the appropriate tool for easy use with quick couplings.

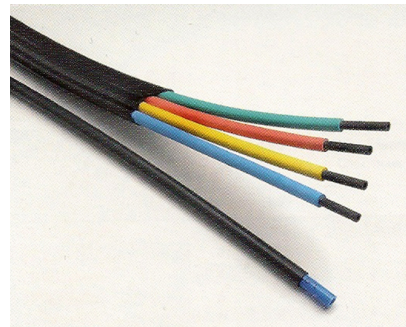

Mastertubi.it/q?398

Pipe diameters with sheath mm	Weight g/m	Radius of curvature mm	Pressure of exercise Bar	Pressure of explosion Bar
2x4x6	31	10	56	167
4x6x8	46	20	33	100
6x8x10	68	30	24	71
7.5x10x12	80	40	24	71
9x12x14	100	70	24	71