


COMPRESS HOSE 20 bar

HOSES › Compressed air hoses

SBR rubber hose with synthetic thread reinforcement.
Smooth black cover, underlayer resistant to traces of sprayed oil.
Operating pressure 20 bar, burst 60 bar.
Operating temperature: -30° C +70° C.
Use: compressed air/water/inert fluid delivery

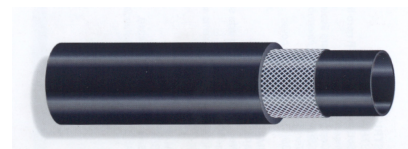

Mastertubi.it/q?268

Code	ØixØe mm	Radius of curvature mm	Weight Kg/m	Rolls m
01G020006/014	6x14	18	0.20	100
01G020008/017	8x17	24	0.28	100
01G020010/019	10x19	30	0.32	100
01G020013/023	13x23	60	0.40	50
01G020016/026	16x26	70	0.48	50
01G020019/030	19x30	80	0.42	50
01G020025/37	25x37	100	0.90	50