

## BITUMEN PIPE-SD/15

HOSES › Hydrocarbon suction hoses

FLEXIBLE RUBBER HOSE FOR THE SUCTION AND DELIVERY TRANSFER OF HOT OIL AND LIQUID BITUMEN/ASPHALT.

The hose is made of FLUORINATED ELASTOMER (FKM) resistant to both temperature and hydrocarbons. Standard smooth or corrugated version for large diameters.

Operating pressure 15 bar - burst safety coefficient 3 45 bar.

Vacuum resistance 0.90 bar

Operating temperature -30° +180°C


Diameters available from 50 to 203mm

Textile reinforcement inserted with incorporated steel spiral.

40 meter rolls

### Standard dimensions

diameter internal mm	Diameter external mm	Weight	Radius of curvature mm	Pressure of exercise Cafe
50	68	2.60	260	15
76	95	3.30	450	15
90	109	4.00	540	15
102	122	4.50	610	15
127	147	6.80	760	15

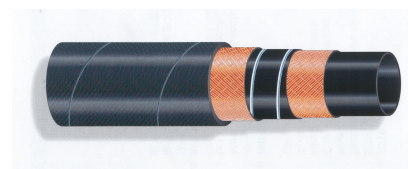

[Mastertubi.it/q?592](http://Mastertubi.it/q?592)