


LIQUID HOSE/P

HOSES › FLEXIBLE HOSES FOR LIQUID SUCTION, WELL CLEANING, AGRICULTURE

Flexible PVC hose with rigid shock-proof and crush-proof PVC reinforcement spiral. Resistant to atmospheric agents and most chemical products. Smooth internal surface. Good resistance in suction and delivery.

Suitable for contact with food EU Regulation 10/2011 EC 1935/2004 2007/19EC ABCD1 simulants.

Operating temperature: -15°C +60°C Yellow colour, transparent with ivory spiral.

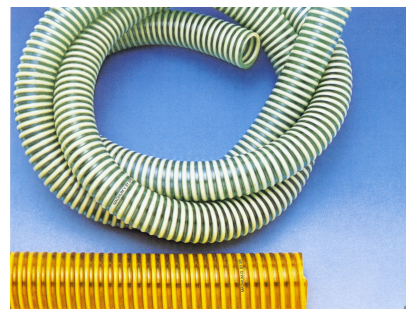

Mastertubi.it/q?281

Code	Dimensions mm	Weight g/m	radius of curvature mm	Pressure maximum bar	Rolls m
04PLIQUIP0020	20x25	280	100	8	50
04PLIQUIP0025	25x31	330	120	8	50
04PLIQUIP0030	30x37	420	160	7	50
04PLIQUIP0032	32x39	460	160	7	50
04PLIQUIP0035	35x41	500	180	7	50
04PLIQUIP0038	38x45	550	200	6.5	50
04PLIQUIP0040	40x47	600	200	6.5	50
04PLIQUIP0045	45x52	670	230	6.5	50
04PLIQUIP0050	50x58	810	250	6	50
04PLIQUIP0060	60x68	970	320	5	50
04PLIQUIP0063	63x70	1040	320	5	50
04PLIQUIP0070	70x78	1200	400	4	50
04PLIQUIP0075	75x85	1380	440	4	50
04PLIQUIP0080	80x91	1560	480	4	30
04PLIQUIP0090	90x100	1800	550	4	30
04PLIQUIP0102	102x115	2160	620	4	30
04PLIQUIP0110	110x121	2400	650	4	30
04PLIQUIP0120	120x131	2800	700	3	20
04PLIQUIP0125	125x137	3150	720	3	20
04PLIQUIP0150	150x163	4250	820	3	20
04PLIQUIP0200	200x218	6500	950	2	10