


POLYGONAL STAINLESS STEEL METALFLEX PIPE with double interlocking

HOSES › Flexible metal pipes

Self-supporting (if constrained) flexible stainless steel pipe with double interlocking, polygonal section, without gasket.

Use: for mechanical protection of electrical cables, gas exhaust and conveyance.

BUILT ACCORDING TO UNI EN ISO 15465:2005 STANDARDS

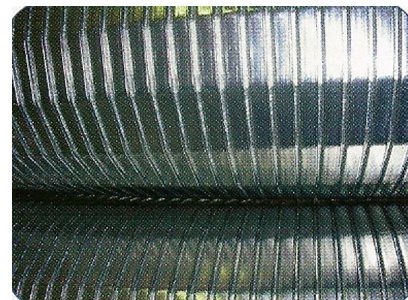

Mastertubi.it/q?1352

CLASSIFICATION	UNI CEI EN 61386
Compressive strength	5
Impact resistance	5
Minimum temperature -40 °C	5
Maximum temperature +600 °C	6
Curvature	Flexible with position hold
Electrical characteristics	Electrical continuity
IP protection according to CEI EN 60529	IP40
Corrosion resistance	High
Tensile strength Ø 60 ÷ Ø 130	5
Flame propagation	Not propagating
Resistance to suspended load	Variable depending on the Ø (4 - 5)
RoHS - REACH	Yes
Material	Stainless steel AISI 304-316L-309
Made in ITALY	Yes

Internal Ø mm	External Ø mm	Encumbrance mm	Radius mm	Weight Kg/m
60	65	66.16	240	1.22
70	75	76.16	297	1.41
80	85	85.91	316	1.60
90	95	95.91	355	1.80
100	105	105.91	393	1.99
110	115	115.91	431	2.19
120	125	125.91	470	2.38
130	135	135.91	508	2.58

