

FUEL HOSE/20 bar

HOSES › Hydrocarbon delivery hoses

Hose suitable for the delivery of fuels, oils and lubricants, diesel with aromatic content up to 50%.

Smooth conductive black NBR rubber tube, with textile reinforcement.


Smooth black NBR/PVC rubber cover resistant to hydrocarbons, atmospheric agents, ozone.

packs of 30 or 100 metres

Operating temperature: -25° +80°C

WORKING PRESSURE 20 bar

BURST PRESSURE 60 bar

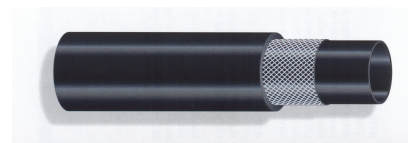

Mastertubi.it/q?1192

item	Dimensions mm	Radius of curvature mm
06GNBR2005/13	5x13	40
06GNBR2006/13	6x13	40
06GNBR2006/14	6x14	50
06GNBR2008/15	8x15	60
06GNBR2008/17	8x17	65
06GNBR2010/17	10x17	75
06GNBR2010/19	10x19	80
06GNBR2013/21	13x21	95
06GNBR2013/23	13x23	105
06GNBR2016/26	16x26	120
06GNBR2019/29	19x29	140
06GNBR2019/30	19x30	145
06GNBR2025/36	25x36	200