


METAL PVC PIPE

HOSES › Specific flexible hoses for engine test rooms

TRANSPARENT PVC flexible hose with harmonic steel reinforcement spiral. Smooth internal and external surface. Resistant to the action of atmospheric agents and most chemical products. Excellent resistance in suction and delivery. Non-toxic hose suitable for contact with food according to directive 2007/18 EC simulants ABCD1 and subsequent amendments

Operating temperature from -15°C to +65°C

Applications: delivery and suction of water, industrial liquids, chemical and agricultural products, compatible food substances.

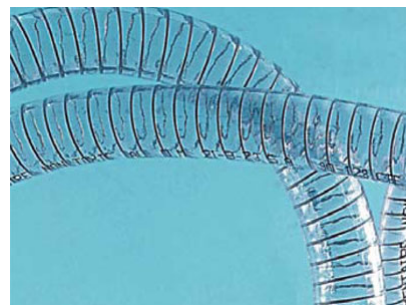

Mastertubi.it/q?282

Code	Dimension mm	Weight g/m	radius curvature mm	Pressure at T 20°C Bar	empty mH ₂ O	Rot. m
05METALPVC010	10x16	160	20	8	9	60
05METALPVC012	12x18	180	25	8	9	60
05METALPVC014	14x20	230	30	8	9	60
05METALPVC016	16x22	270	35	8	9	60
05METALPVC018	18x24	300	40	7	9	60
05METALPVC020	20x27	340	50	7	9	60
05METALPVC022	22x29	380	55	6	9	60
05METALPVC025	25x33	500	60	6	9	60
05METALPVC030	30x38	600	70	5	9	60
05METALPVC032	32x41	650	75	5	9	60
05METALPVC035	35x44	750	80	5	9	60
05METALPVC038	38x47	800	90	4.5	9	30
05METALPVC040	40x49	930	95	4.5	9	30
05METALPVC045	45x55	1150	110	4.5	8.5	30
05METALPVC050	50x60	1450	125	4	8.5	30
05METALPVC060	60x72	1800	140	4	8.5	30
05METALPVC063	63x75	1880	150	4	8.5	30
05METALPVC070	70x83	2100	180	3.5	8.5	30
05METALPVC076	75x85	2300	200	3.5	8.5	30
05METALPVC080	80x94	2500	220	3	8.5	30
05METALPVC090	90x103	2900	260	3	8.5	30

05METALPVC102	102x115	3700	310	3	8.5	30
05METALPVC125	125x144	4700	385	2	6	20
05METALPVC152	152x170	6350	460	2	6	20