

FLEX HOSE 150 double wall

HOSES › Specific flexible hoses for engine test rooms

Flexible hose made with a **double** layer of neoprene-coated fiberglass fabric reinforced with a harmonic steel spiral and sewn external fiberglass cord. It can be made with smooth sleeves on the ends, a good alternative to facilitate pipe installation.

Very flexible, light and with great axial compressibility of approximately 30%, this is a tube with a spring effect.



Black colour.

Maximum pressure approximately 3 times the operating pressure.

Operating temperature from -55° to 130°C (150°C for short periods of time).

Standard length 4 metres, special executions on request.

Complies with flame retardant regulations, class m1 (UNE 23723-90) CL V0 UL94.

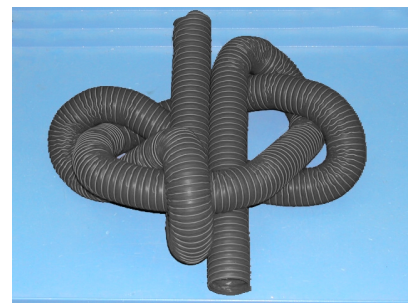

Mastertubi.it/q?362

Use:

- Cooling of electronic units.
- Transport of hot air in printing machines.
- Transport of hot air in machines for the production of plastic bags.
- Extraction of exhaust gases from engines.
- Suction of welding gas. industrial extraction and ventilation, cooling of electronic devices, conveyance of air and gas at high and low temperatures, ideal in motor vehicles due to its flexibility.

Upon request, it can be supplied in sizes for use with sleeves at the ends.

Production diameters: 19 - 25 - 28 - 30 - 32 - 35 - 38 - 39 - 41 - 44 - 51 - 55 - 57 - 60 - 63 - 64 - 65 - 70 - 76 - 80 - 83 - 90 - 95 - 102 - 114 - 120 - 121 - 127 - 130 - 140 - 150 - 152 - 160 - 165 - 180 - 203 - 229 - 254-305.

Code item	Dimensions Ø mm	Pressure of exercise Cafe	Depression Cafe	Radius of curvature m	Weight gr/m

11NV15DS00019	19	3	0.73	9	110
11NV15DS00025	25	2.8	0.71	12	185
11NV15DS00038	38	2.6	0.60	18	305
11NV15DS00051	51	2.6	0.52	24	360
11NV15DS00063	63	2.4	0.4	31	485
11NV15DS00076	76	2.2	0.43	38	580
11NV15DS00089	89	2.0	0.4	44	690
11NV15DS00095	95	1.9	0.37	49	730
11NV15DS00102	102	1.9	0.35	52	770
11NV15DS00114	114	1.5	0.30	60	845
11NV15DS00127	127	1.40	2.40	69	925
11NV15DS00152	152	1.20	0.17	75	1200
11NV15DS00178	178	1.0	0.12	90	1430
11NV15DS00203	203	0.7	0.09	101	1650
11NV15DS00250	250	0.5	0.07	150	2090
11NV15DS00305	305	0.3	0.05	200	2550