

VENAFLON HF TUBE

HOSES › Hoses for food products

Chemical resistant silicone hose with PFA inner layer compatible with highly aggressive chemical products.

Applications

It is particularly suitable for the transport of liquids or semi-liquids chemically aggressive by impulse or suction in industry food, cosmetics, chemicals and pharmaceuticals.

It has a wide range of application thanks to its construction, which provides a balance between strength and lightness.


Property

- Odourless, tasteless and completely non-toxic.
- High flexibility.
- White and smooth appearance of the internal PFA layer, translucent and smooth appearance of the outer silicone layer.
- Can be equipped with 316L stainless steel fittings on each ends with a roughness value lower than 0.8 µm (or 0.5 µm on request).
- On request it can be equipped with Clamp fittings with internal PFA covering.
- Operating temperature range -30°C (-22F) to +150°C (302F).
- The hose is produced with a maximum length of 20 m (65.62 feet).
- Vacuum resistance is 0.9 bar (13.05 psi).


Construction This reference is manufactured with a white inner layer of PFA

(perfluoroalkoxy), the reinforcements are in polyester and the spiral is in stainless steel

(AISI 304) coated with silicone.

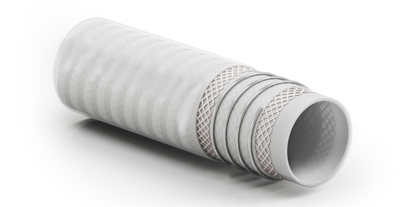

Mastertubi.it/q?1035

environment version  with conductive PFA inner layer, black color certified for food and pharmaceutical use (see below).

Characteristics

- External layer in VMQ Silicone, smooth and translucent.
- Reinforcement Stainless steel wire spring and polyester fabric reinforcement.
- Internal layer PFA fluoropolymer, smooth and white.
- Temperature -30°C +150°C
- Production length 20m. Can be cut upon request.
- Vacuum pressure 0.9 bar (13.05 psi).

Regulations

The inner layer of PFA complies with :

- US FDA Standard 21 CFR 177.1550
- USP Class VI in vivo test - USP Class VI in vitro test
- ISO 10993-5, 10 and 11 - Reg 1935/2004 / EEC and Reg 10/2011 / EEC

The outer silicone layer complies with :

- US FDA Standard 21 CFR 177.2600
- USP Class VI in vivo tests
- USP Class VI in vitro test
- ISO 10993-5, 10 and 11
- European Pharmacopoeia 3.1.9

DIAMETER INTERNAL mm	WALL THICKNESS ISO 1307 +/- 0.80mm	OPERATING PRESSURE ISO 1402 Bar at 20°C	RADIUS OF CURVATURE mm
10	6	10	40
13	6	10	45
16	6	10	55
19	6	10	65
25	6	10	85
32	6	10	120
38	6.5	10	140
51	8	10	180
63.5	8	5	320
76	8	5	380
100	9	3	500