

PU WIND HOSE/Heavy - antistatic - food grade

HOSES › Food grade abrasive fluid hoses

Transparent wall tube entirely in ether-based ELASTOLLAN TPU POLYURETHANE with reinforcement spiral in ivory-coloured shockproof rigid PVC. Perfectly smooth food grade interior. With a corrugated external appearance, the tube is very light and flexible with notable resistance to abrasion and bending, complete with copper cable for electrical conductivity.

Polyurethane leaf thickness:

Ø 38 thickness 0.80mm


from Ø 40 to Ø 150 thickness 1.00mm

Resists many chemicals and microbial and hydrolytic attacks.

FDA approval CFR 21-Item 177.2600 [dry (d), aqueous (e) and fatty (f) foods]

EU Reg. 10/2011 approval (classes A, B, C, D2 and dry foods)

Suitable for the food industry for the transport of powders and dry abrasive substances, even hot ones up to a maximum temperature of +80° or up to -40°C.

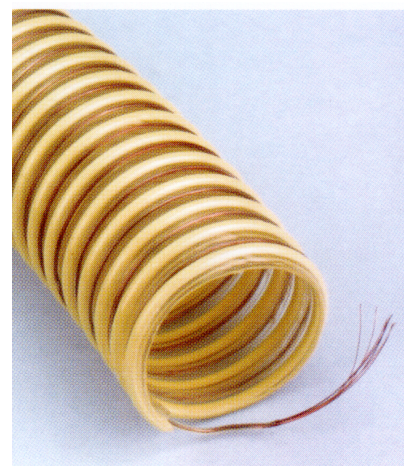

Mastertubi.it/q?414

Also available in the non-antistatic version (without incorporated copper wire)

Code	Dimensions mm	Weight g/m	Depression mH2O	Radius of curvature mm	Rolls m
11PVPUATPPA038A	38x45	310	3	130	30
11PVPUATPPA040A	40x47.2	350	3	140	30
11PVPUATPPA052A	50.8x59.4	550	3	175	30
11PVPUATPPA055A	55x58.6	590	3	190	30
11PVPUATPPA060A	60x68.6	640	3	200	30
11PVPUATPPA063A	63x72.1	670	3	230	30

11PVPUATPPA070A	70x79.6	750	3	250	30
11PVPUATPPA760A	76x85.8	810	2.5	270	30
11PVPUATPPA080A	80x90.4	900	2.5	290	30
11PVPUATPPA090A	90x100.8	1050	2.5	360	30
11PVPUATPPA100A	100x111.8	1240	2.5	400	30
11PVPUATPPA110A	110x122.2	1380	2.5	440	30
11PVPUATPPA120A	120x132.2	1500	2.5	470	30
11PVPUATPPA127A	127x139.2	1600	2.5	500	30
11PVPUATPPA150A	151.5x164.7	2000	2	600	20