

SPIRALCHEMICAL/10-FLEX

HOSES › Chemical hoses

SUPERFLEXIBLE ANTISTATIC BLACK RUBBER HOSE RESISTANT TO HEAT, ABRASION, WEATHER AGENTS AND OZONE, SMOOTH EXTERNAL AND INTERNAL SURFACE


Multipurpose hose suitable for suction and pressure delivery of: hot water, sea water, neutral and basic acid solutions, water-based paints and ketones and for solvents with esters.

COVER: in ANTISTATIC black rubber $R < 10^6 \text{ O}$, high resistance textile reinforcements inserted together with the spiral

WORKING TEMPERATURE: $-40^{\circ} + 120^{\circ} \text{ C}$

WORKING PRESSURE: 10 BAR - BURST 30 BAR

Packed in standard 40 meter rolls.

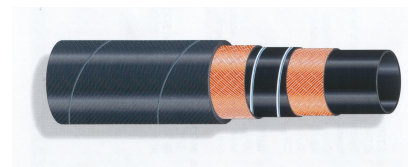

Mastertubi.it/q?989

Diameter internal	Diameter external	Thickness wall	Weight	Empty	Radius of curvature
19mm	29mm	5 mm	0.59 kg/m	0.8 bar	115mm
25 mm	35mm	5 mm	0.72 kg/m	0.8 bar	150 mm
32mm	42mm	5 mm	0.89 kg/m	0.8 bar	190 mm
38mm	49mm	5.5mm	1.16 kg/m	0.8 bar	230 mm
40 mm	51 mm	5.5mm	1.25 kg/m	0.8 bar	240 mm
51 mm	62mm	5.5mm	1.45 kg/m	0.8 bar	300 mm
63 mm	75 mm	6 mm	2.00 kg/m	0.8 bar	380 mm
76 mm	90 mm	7 mm	2.35 kg/m	0.8 bar	450 mm
102mm	116 mm	7 mm	3.80 kg/m	0.8 bar	600 mm